

Tâches backend avec Celery


Martin De Wulf

Pourquoi?

Augmenter la réactivité

Gérer les tâches longues

Distribuer le travail sur plusieurs serveurs

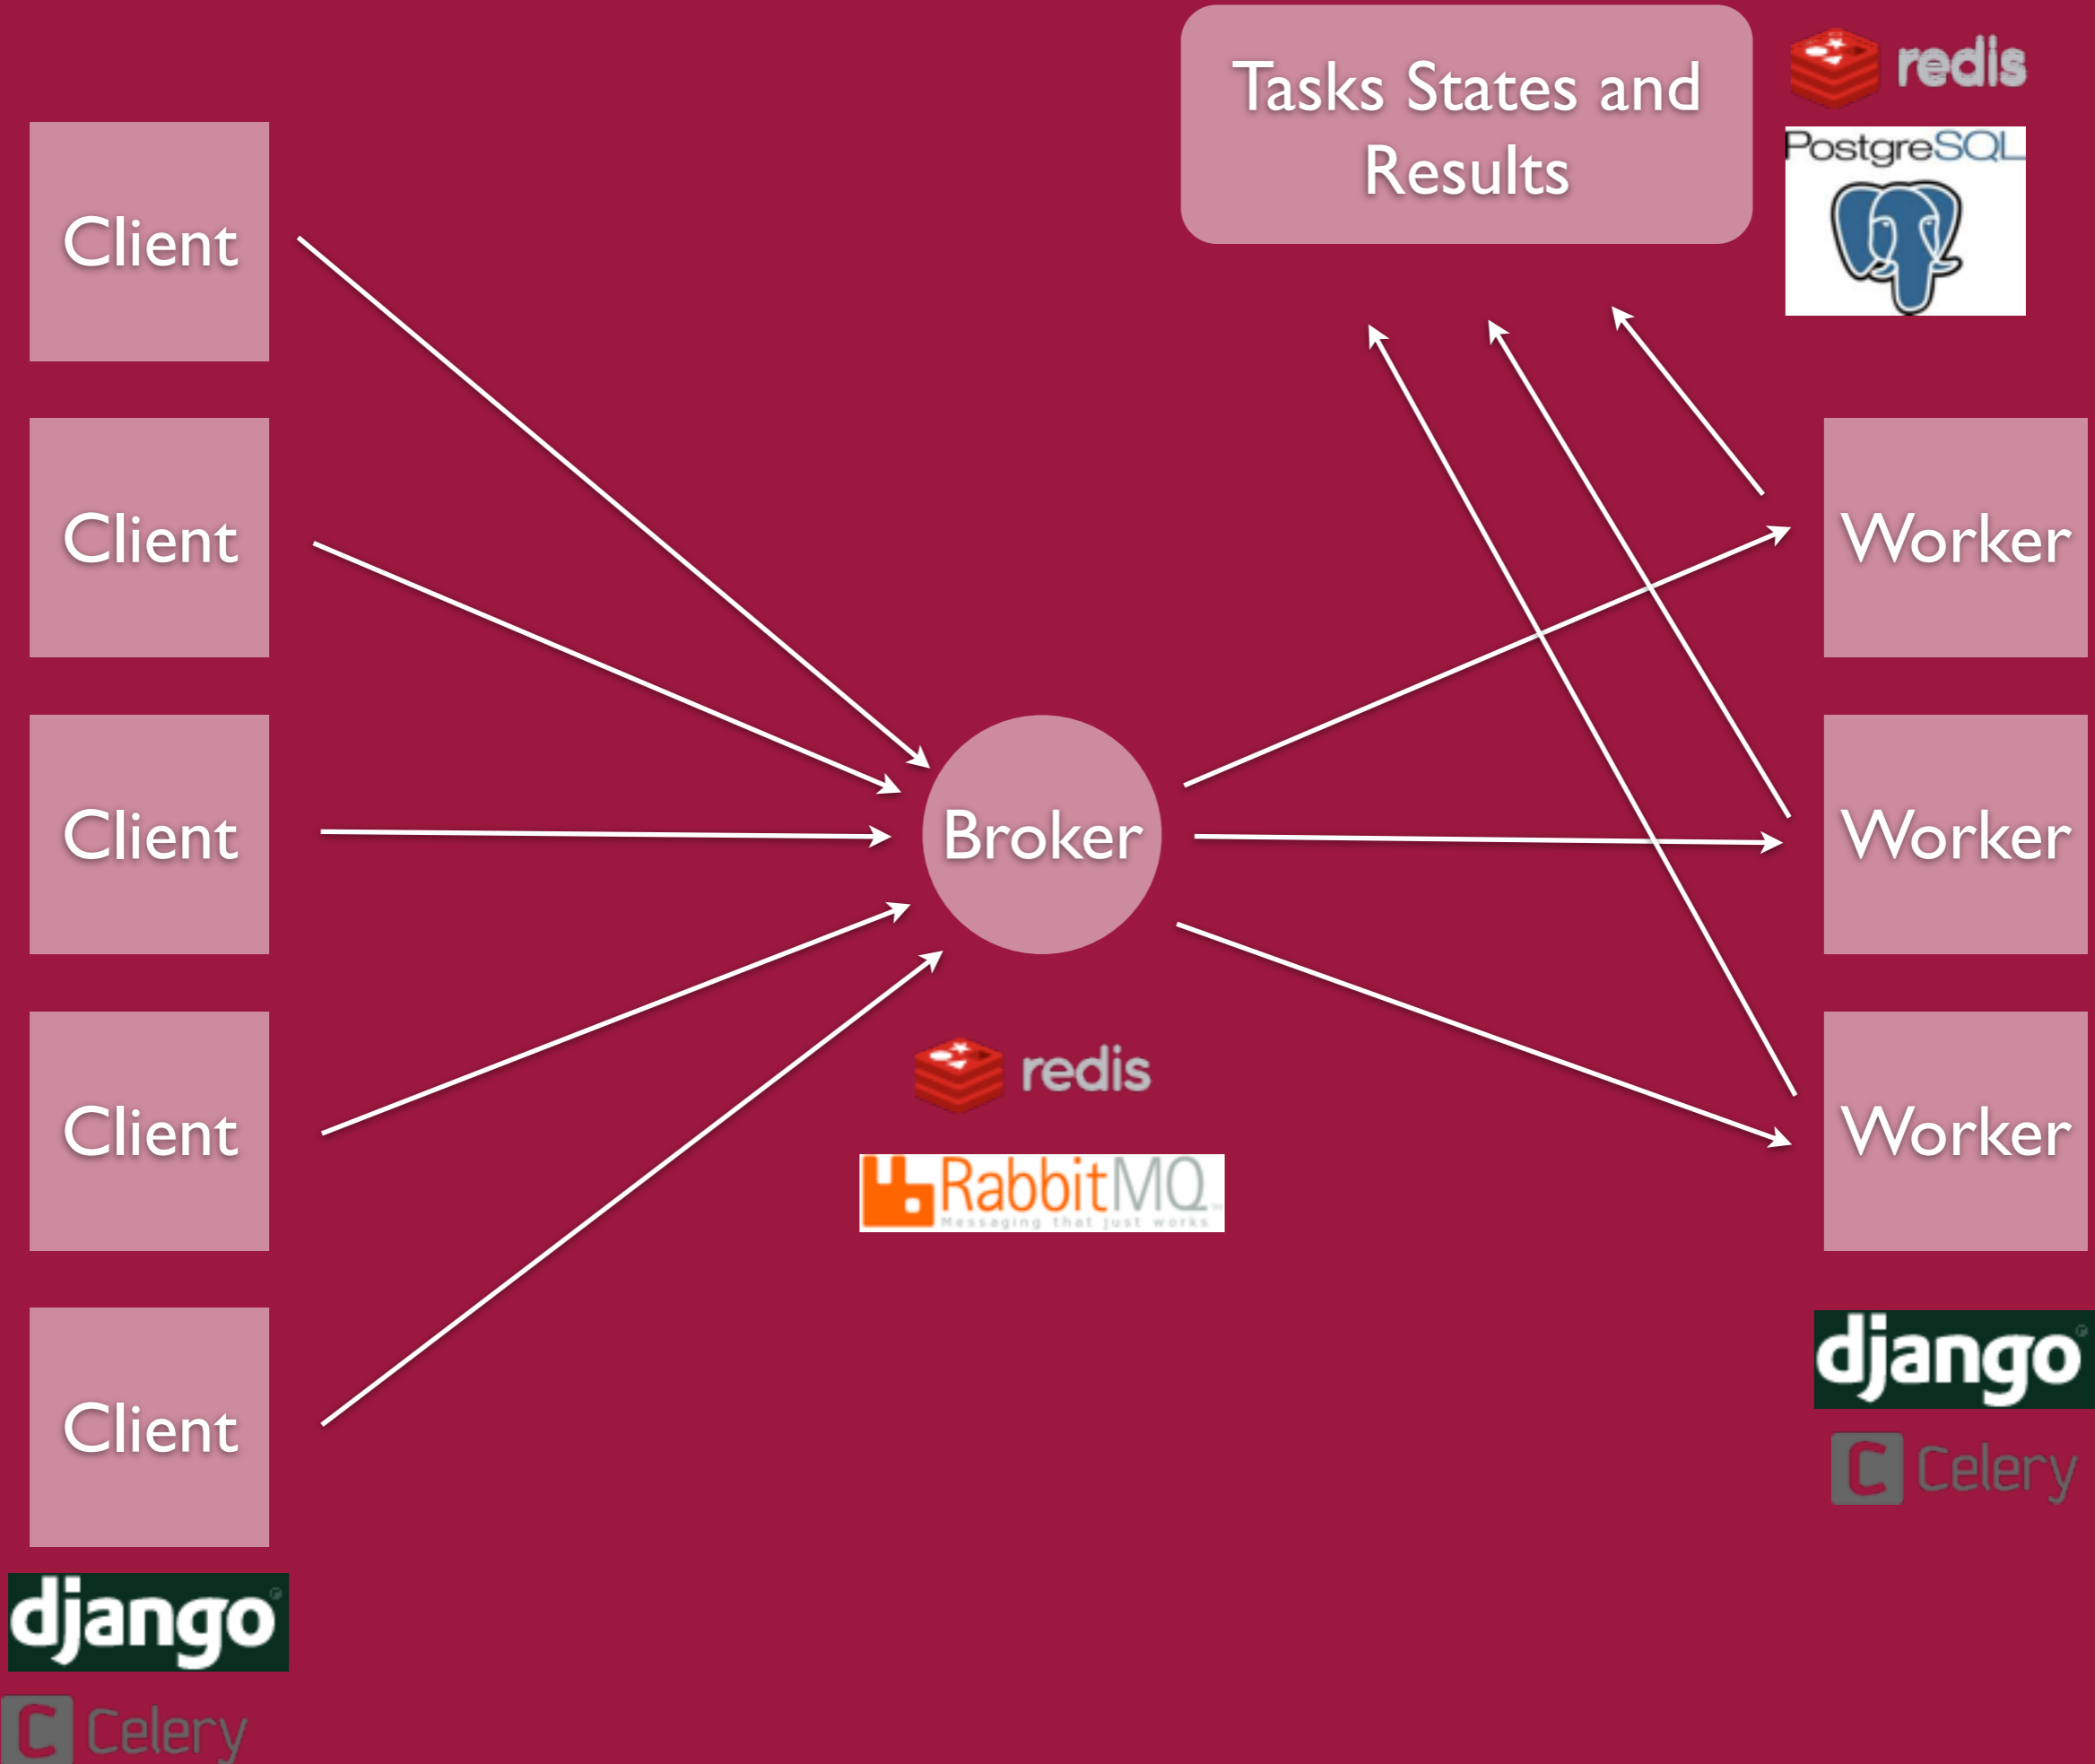

Features

Tâches synchrones, asynchrones, planifiées

Support pour différents backends

Ensemble de tâches, sous-tâches

SHOW YOU LIKE IT BETA

EVERYBODY'S LIKES
MY FRIENDS' LIKES
MY PERSONAL PAGE

LOG IN WITH FACEBOOK

[Logout Martin D.](#)

WHICH BELGIAN BEER IS LIKED THE BEST?



EVERYBODY'S LIKES

- ALL
- MUSIC
- MOVIES
- PEOPLE
- SPORT
- BOOKS
- GAMES
- GROUPS
- PLACES
- INTERNET
- MORE >>



Show the most trendy...

Daily | Weekly | Monthly | **Ever**

Male + Female | Only male | Only female

All languages selected

Age from -- to -- year

Search something...

1943 results for your search, [Clear search](#)



Views.py

```
def user_login(request, fb_access_token):  
    task_id = fetch_user_privacy.delay(fb_access_token)  
    return "Everything will be fine :%s " % task_id
```

Tasks.py

```
from celery.decorators import task
```

```
@task()
```

```
def fetch_user_privacy(fb_access_token):  
    #fetch all my friends ids  
    #fetch all their likes, 20 friends at the time
```

```
./manage.py celeryd
```